




NEOSHOK™

FLOATING SYSTEM
○○○
NEOSHOK

F L O A T I N G S Y S T E M

SYSTEM FEATURES AND BENEFITS

A floating sports floor system with high resiliency and uniformity, consisting in general of a vapor barrier, NeoShok resilient pads, wood subflooring, maple flooring, sanding, sealers, finishes, game lines and wall base.

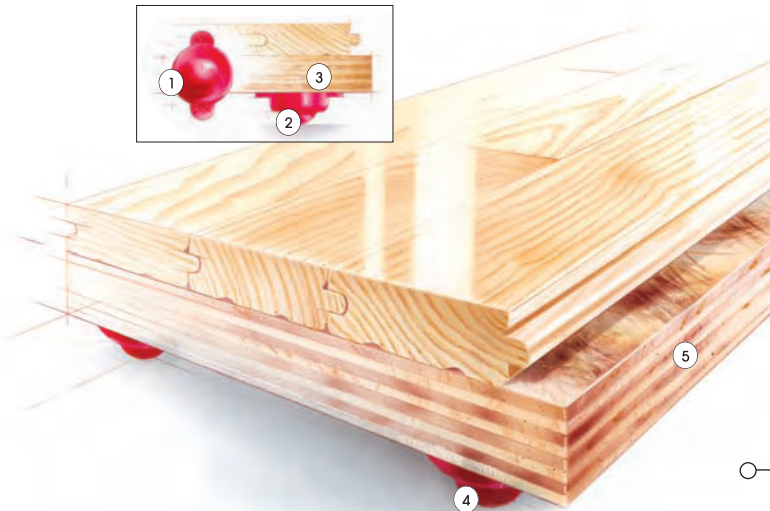


- ① Two-Stage NeoShok Pad
- ② First stage responsive to light loads
- ③ Second stage responsive to aggressive loads
- ④ Quick response contact point and excellent resilient load performance
- ⑤ Two layers of 15/32" (12 mm) APA rated plywood subfloor


SPECIFICATIONS

MANUFACTURING	ISO9001:2008 CERTIFIED
U.S. PATENT #	4,879,857
SYSTEM TYPE	Floating System
ANCHORAGE	No concrete attachment
SUBFLOOR CONSTRUCTION	Plywood Panel
RESILIENCE	Polyurethane NeoShok Pads
SLAB DEPRESSION	25/32" (20 mm) flooring - 2 1/2" (64 mm) 33/32" (26 mm) flooring - 2 3/4" (70 mm)
TESTING LABORATORY	United States Sports Surfacing Laboratory
CERTIFIED TESTING	ISSS Scientific Body Member Laboratory Testing
GREEN STATUS	Managed forests, certification available


WALL BASE DETAIL

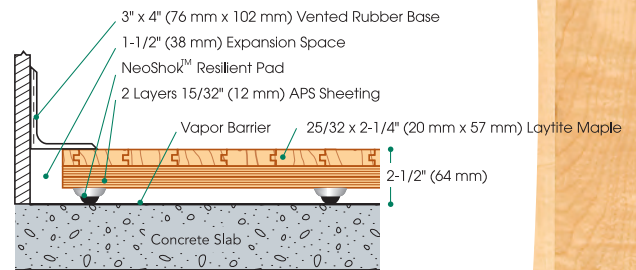

THRESHOLD DETAIL (optional accessory)

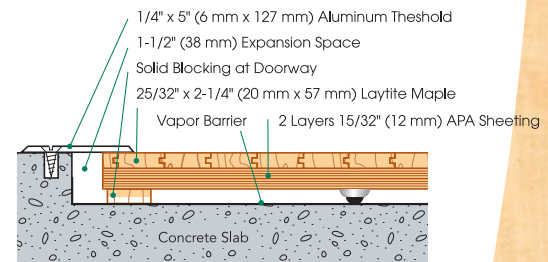

EQUIPMENT DETAIL (optional accessory)

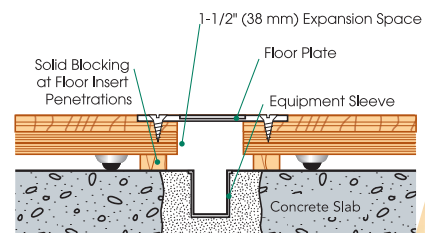

www.freewill.co.in